

Power Light. Forza creativa.



Tutta la forza della tecnologia e del design della linea Power ripensato, riadattato e riproposto in una soluzione dall'aria ancora più giovane, snella e dinamica. La nuova Power Light consente una perfetta integrazione fra l'area gelateria e l'area pasticceria sia in ambienti di dimensioni ristrette che in locali con metrature più ampie.

Power Light. Creative Power.

All the power of the technology and design of the Power line recreated, readapted and proposed once again in a solution with an even younger, trimmer and dynamic air. The new Power Light allows for perfect integration between ice-cream and pastry both in areas of small dimensions and those that are larger.



Refrigerazione ventilata

Ventilated refrigeration



Refrigerazione ventilata o ventilata soft

Ventilated or soft ventilated refrigeration



Cassetto cassa sul desk di connessione fra le vetrine

Cash Register located on the desk connecting the two showcase cabinets

Power Light




Vetrine gelato Gelato cabinet

Modello Model	Dimensioni Dimensions		Imballo Packaging		Temperatura prodotto vasca EN44 1-5 Well product temperature EN44 1-5	Potenza compressore Power compressor						Classe climatica N° Climate class N° (C°/°UR)	Sbrinatorio auto.elett. Automatic electric defrost	Unità di controllo elettronica Electronic control unit	Fluido refrigerante R404A R404A refrigerant gas	Tendina avvolgibile Roller blind
						Semiermetico Semi-hermetic			Ermetico Hermetic							
	Lungh. x prof. x alt. (LxDxH) length x depth x height (LxDxH) (mm)	Peso netto Net weight (kg)	Imballo (LxDxH) Packaging (LxDxH) (mm)	Peso lordo Gross weight (kg)		Tensione Supply (V/Hz)	Regime Output (kW)	Sbrinatorio In defrost (kW)	Tensione Supply (V/Hz)	Regime Output (kW)	Sbrinatorio In defrost (kW)					
● di serie standard																
Power Light 12	1150x 1204x 1350	245	1240x 1281x 1538	285	-16/-18°C	400/3/50	1,3	2,52	230/1/50	1,43	1,94	4+(32/60)	●	●	●	●
Power Light 18	1655x 1204x 1350	335	1745x 1281x 1538	380	-16/-18°C	400/3/50	1,97	3,87	230/1/50	1,65	3,63	4+(32/60)	●	●	●	●
Power Light 24	2190x 1204x 1350	400	2210x 1281x 1538	470	-16/-18°C	400/3/50	2,8	5,1	230/1/50	2,69	4,59	4+(32/60)	●	●	●	●


Vetrine | Cabinet



Refrigerazione ventilata con doppio flusso dell'aria
Ventilated refrigeration with double air flow



Componibilità vaschette | containers arrangement

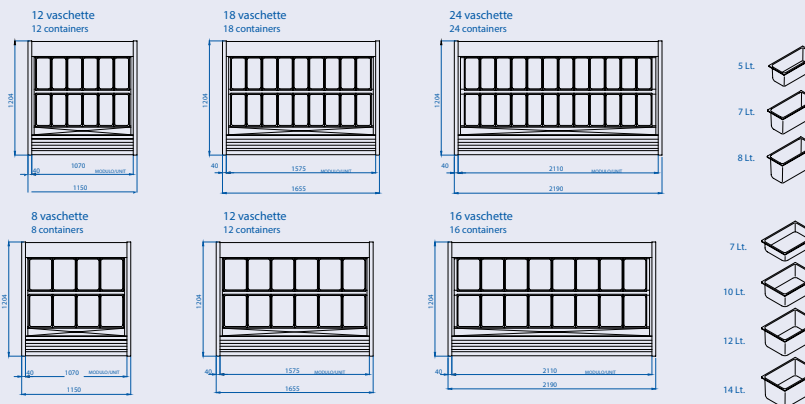



Vetrine pasticceria
Pastry cabinet

Modello Model	Dimensioni Dimensions		Imballo Packaging		Temperatura prodotto vasca EN44 1-5 Well product temperature EN44 1-5	Potenza Power output		Classe climatica N° Climate class N° (C°/LUR)	Sbrinatorio auto.elett. Automatic electric defrost	Unità di controllo elettronica Electronic control unit	Fluido refrigerante R404A R404A refrigerant gas	Tendina avvolgibile Roller blind
						Compressore ermetico Hermetic compressor						
	Lungh. x prof. x alt. (LxPxH) length x depth x height (LxDxH) (mm)	Peso netto Net weight (kg)	Imballo (LxPxH) Packaging (LxDxH) (mm)	Peso lordo Gross weight (kg)		Tensione Supply (V/Hz)	Regime Output (kW)					
● di serie standard												
Power Light 100	1150x 1204x 1350	245	1240x 1281x 1538	285	+2/+4°C	230/1/50	0,66	4+(32/60)	●	●	●	●
Power Light 160	1655x 1204x 1350	335	1745x 1281x 1538	380	+2/+4°C	230/1/50	0,85	4+(32/60)	●	●	●	●
Power Light 200	2190x 1204x 1350	400	2210x 1281x 1538	470	+2/+4°C	230/1/50	1,10	4+(32/60)	●	●	●	●

Vetrine | Cabinet



Refrigerazione ventilata o ventilata soft
Ventilated or soft ventilated refrigeration

Vista dall'alto | Top view

